
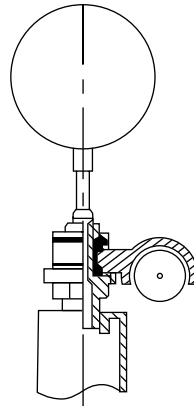



# External Revolving - Ground Set

Model # ESR40C72-AA

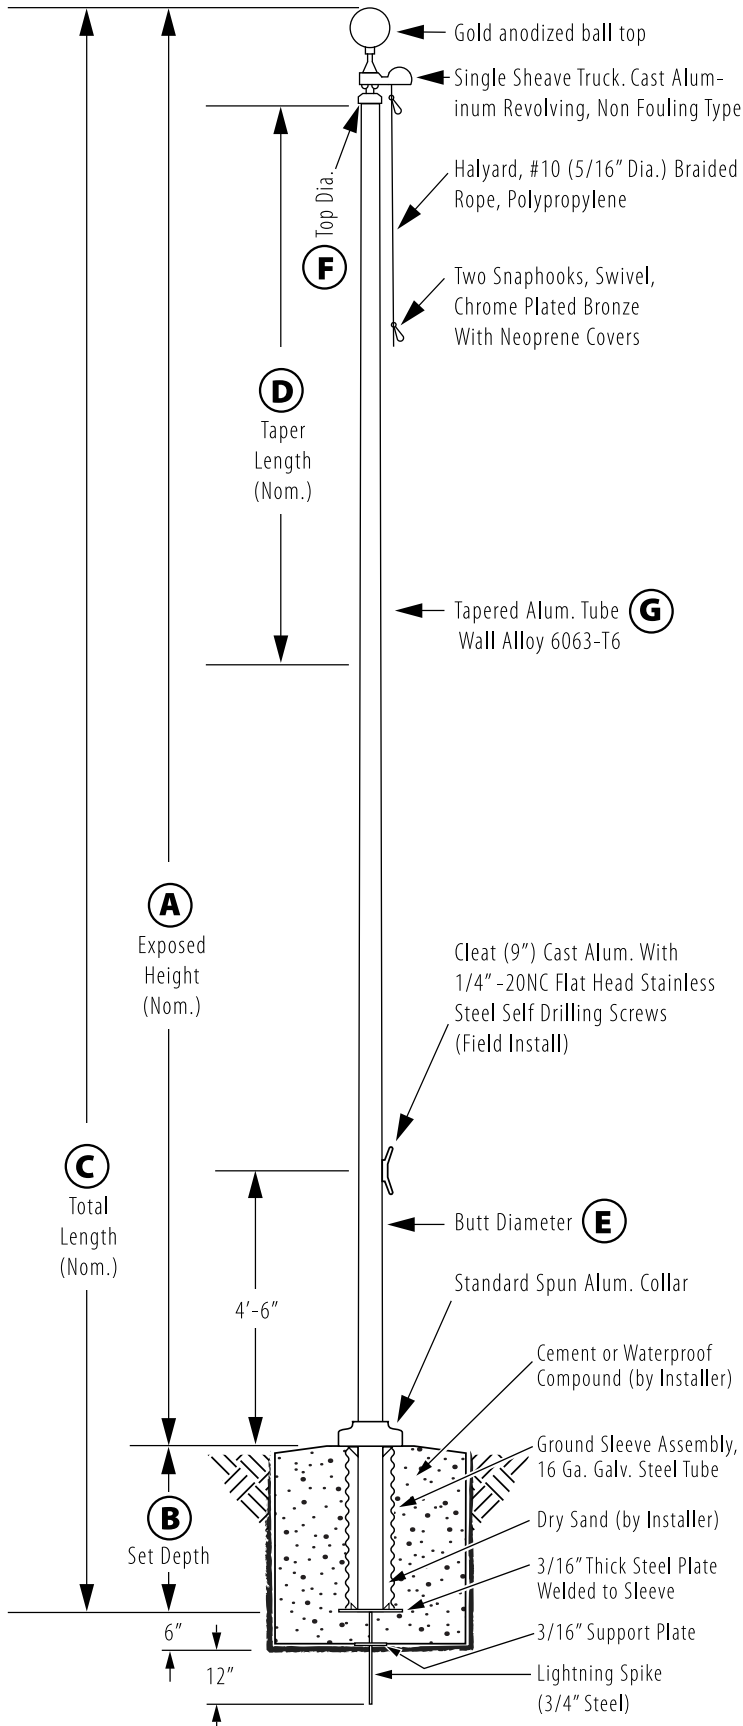

### Truck Detail

Aluminum body, Stainless Steel Ball Bearings, Aluminum Sheave, Cast Aluminum Spindle

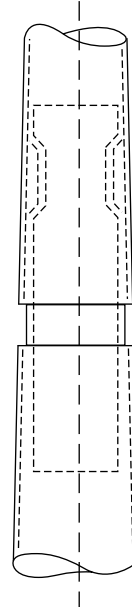

All shafts with overall length of 33' or more are shipped in **two sections**

1-1/2" maximum shop gap allowed for field fitting (ram for tight joint)

Joint occurs on 2 or more piece flagpoles.

Customer Name:

Rep Name:

Architect Name:

Project:

Location:

PO Number:

Quantity:

Notes:

|                           |              |
|---------------------------|--------------|
| <b>A - Exposed Height</b> | 40 ft.       |
| <b>B - Set Depth</b>      | 4 ft.        |
| <b>C - Total Length</b>   | 44 ft.       |
| <b>D - Taper</b>          | 19 ft. 3 in. |
| <b>E - Butt Diameter</b>  | 7 in.        |
| <b>F - Top Diameter</b>   | 3 1/2 in.    |
| <b>G - Wall Thickness</b> | 0.156 in.    |

**Finish:**  
Anodized, Clear

**Piece: 2**

**Accessories:**  
Gold anodized ball top,  
standard collar